

LS PAR 1512

Model: PR-6208



RoHS | CE | LED | 1.5m | IP67 | T_c150°C | T_a40°C | 

LS PAR 1512 is a new launched exterior par, rating IP67. It's equipped with PHILIPS 12 pcs of 15W LEDs(RGBA 4 in 1), provides countless color mixing effects, ideal for multi-scale outdoor stages, buildings, theme parks, etc.

IP67, 12x15W, RGBA 4 in 1



Scan with your Phone
to view more detail



10Kg
Size(mm)

Specifications





- Input Voltages
100-240V AC, 50/60Hz
- Power Consumption
180W@220V
- Light Source
PHILIPS 12x15W LEDs(RGBA 4 in 1), 50,000 hrs
- Strobe
Electronic strobe, 0.5-33 F.P.S
- Dimmer
0-100% linear adjustment
- Colors
R/G/B/A color mixing
- Light Angle
Beam angle(1/2 peak) $\theta_{1/2}$: 14°(optional 10°, 20° and 40°)
- Control
International DMX512, 3 pins interface
Standard mode 6 channels and extended mode 11 channels
Master-slave mode, test mode
DMX control mode, preset memory and user memory
- Other Functions
LED board temperature and fixture usage time can be checked via menu
DMX channel mode and settings displayed
LED and inverted display
Display backlight automatically shut off after delay
Transmitted under synchronization
- Physical
Housing: high intensity cast aluminum alloy, IP67
Ambient working temperature: -20°C~40°C
- Weight
Net weight: 10kg

- Packaging
Standard: carton 475x395x380(mm)
Optional: flight case 873x585x395(mm), 4 in 1
- Accessories
C clamp, 1 pc
Signal adapter cord, 2 pcs
Power cord, 1 pc
Safety cord, 1 pc
Optional: N/A



ARC LED 3216

Model: PR-6210



RoHS | CE |  WDMX | LED |  10m |  IP₆₇ | T_c150°C | T_a40°C | 

ARC LED 3216 is a new launched exterior architectural luminaire, with two independent heads. It features 216 pcs of Philips 3W LEDs(RGBW, RGBL, RGBA and RGWA), color temperture linear adjustment, amazing wash effect with rating IP67. It's ideal for medium and large scale stadiums, architectural lighting, theme parks, etc.

IP67, R/G/B/W/L/A




Scan with your Phone
to view more detail



29.6Kg
Size(mm)

Specifications

- Input Voltages
100-240V AC, 50/60Hz
- Power Consumption
700W@220V
- Light Source
PHILIPS 216x3W(RGBW, RGB/Lemon, RGB/Amber, RGW/Amber), 50,000 hrs
- Strobe
Electronic strobe, 0.5-33 F.P.S
- Dimmer
0-100% linearly adjustable
- Colors
RGBW, RGB/Lemon, RGB/Amber, RGW/Amber , with macro
- Light Angle
Beam angle(1/2peak) $\theta_{1/2}$: 9°
- Control
International DMX512, 3 pins interface
Standard mode 6 channels and extended mode 11 channels, HIS mode 5 channels and HSIC mode 6 channels
Master-slave mode, test mode
16 Preset memories, 16 user memories
Preset memories and user memories can be loaded by control channels
- Other Functions
LED board temperature display
Fixture usage time display
Brightness level control
Timer control
DMX mode, setting status, operation mode and user memory data can be transmitted by synchronous control
DMX512 wireless receiver(optional)
DMX512 wireless transmitter(optional)
- Physical
Housing: high-intensity die-casting aluminum, IP67
Ambient working temperature: -20°C~40°C
- Weight
Net weight: 29.6kg
- Packaging
Standard: carton 825x795x425(mm)
Optional: flight case
- Accessories
G clamp, 2 pcs
Signal adapter cord, 2 pc
Safety cord, 1pc
Optional: omega clamp, 2 pcs

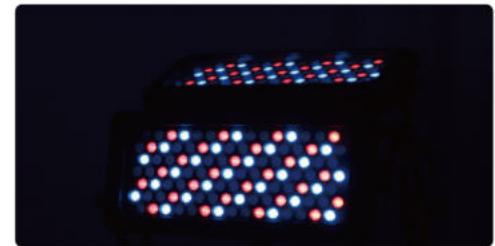

LS PAR 1524

Model: PR-6220



RoHS | CE | LED | 1.5m | IP65 | T_c150°C | T_a45°C | 

The unit is a high temperature resistant and high-brightness luminaire, equipped with PHILIPS 24 pcs 15W LEDs(RGBW 4 in 1) engine. It features color mixing system, combined with 16° light angle(optional: 22°, 30°), super-fast strobe, rating IP65, etc. It's widely applied in urban buildings lighting, landscape lighting and other multi-scale of locations.

IP65, RGBW 4 in 1



Scan with your Phone
to view more detail




20Kg
Size(mm)

Specifications

- Input Voltages
100V~240V AC,50/60Hz
- Power Consumption
320W@230V
- Light Source
PHILIPS 24x15W LEDs(RGBW 4 in 1), 50,000 hrs
- Strobe
Electronic strobe, 1-25 F.P.S
- Dimmer
0-100% linear adjustment
- Colors
RGBW and color mixing
- Light Angle
Beam angle (1/2 peak) $\theta_{1/2}$: 16°(optional: 22° and 30°)
- Control
International DMX512, 3 pins interface
Short mode 7 channels, standard mode 10 channels
Master-slave mode, stand-alone mode
- Other Functions
LCD panel
Over temperature protection
Fast and convenient software upgrade via DMX512 interface
Built in NTC temperature detecting function, If LED lamp is over heat, its power will be decreased intelligently
- Physical
Housing: high-intensity die-casting aluminum, IP65
Ambient working temperature: -20°C~45°C
- Weight
Net weight: 20kg
- Packaging
Standard: carton 540x470x450(mm)



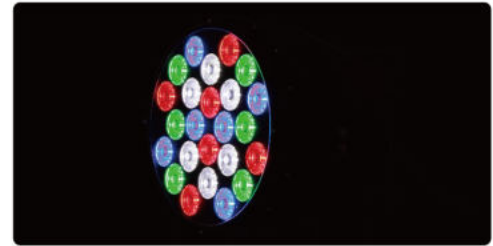


Optional: flight case

- Accessories
C clamp, 1 pc
Signal adapter cord, 2 pcs
Power cord, 1 pc
Safety cord, 1 pc
Optional: transparent cover+ seal+ screws x6, 1 set



ARC LED 1536

Model: PR-6260

RoHS | CE |  |  WDMX | LED |  1.5m |  IP₆₇ | T_c150°C | T_a45°C | 

ARC LED 1536 is a new powerful architectural light, contains PHILIPS 36 pcs 15W LEDs (RGBW 4 in 1). It's ideal for corporate event, festivals and outdoor stage washes.



IP67, RGBW 4 in 1



Architectural Lighting




Scan with your Phone
to view more detail



18Kg
Size(mm)



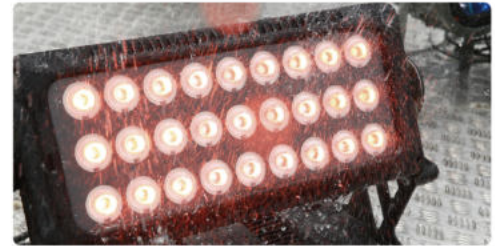

Specifications

- Input Voltages
100-240V AC, 50/60Hz
- Power Consumption
540W@230V
- Light Source
36x15W(RGBW 4 in 1), 50,000 hrs
- Strobe
Electronic strobe, 0-25 F.P.S
- Dimmer
0-100% linearly adjustable
- Colors
R/G/B/W and color mixing , with macro
- Head Movement
Tilt 270°, manual adjustment
- Light Angle
Field angle(1/2 peak) $\theta_{1/2}$: 16°x18°
Field angle (1/10 peak) $\theta_{1/10}$: 34°x 56°
- Control
International DMX512, 3 pins(optional 5 pins) interface
Standard mode 10 channels, extended mode 23 channels,
Master-slave mode, test mode
DMX mode, preset memory mode and user memory mode
- Other Functions
LED board temperature display
Fixture usage time display
Brightness level control
Timer control
Parameters like operation mode and etc. transmitted under
synchronization
DMX512 wireless receiver
DMX512 wireless transmitter(optional)
- Physical
Housing: high-intensity die-casting aluminum, IP67
Ambient working temperature: -20°C~40°C
- Weight
Net weight: 27kg
- Packaging
Standard: carton 795x530x420(mm)
Optional: flight case 900x760x430(mm), 2 in 1
- Accessories
G clamp, 2 pcs
Signal adapter cord, 2 pcs
Safety cord, 1pc
Optional: barndoor 1 set; transparent water proof
panel+seal+screwsx8



ARC LED 1572

Model: PR-6262


RoHS | CE |  | WDMX | LED |  10m |  | T_c150°C | T_a40°C | 

ARC LED 1572 is a new launched exterior architectural luminaire, with two independent heads. It features 72 pcs of Philips 15W LEDs(RGBW 4 in 1), color temperture linear adjustment, combined with 4 individual areas control, 37° x 57° square light, rating IP67. It's ideal for medium and large scale stadiums, architectural lighting, theme parks, etc.

IP67, RGBW, High power



Scan with your Phone
to view more detail




46Kg
Size(mm)

Specifications

- Input Voltages
100-240V AC, 50/60Hz
- Power Consumption
1080W@230V
- Light Source
PHILIPS 72x15W(RGBW 4 in 1), 50,000 hrs
- Strobe
Electronic strobe, 0-25 F.P.S(pulse strobe effect)
- Dimmer
0-100% linearly adjustable
- Colors
R/G/B/W and color mixing , with macro
- Light Angle
Beam angle(1/2peak) $\theta_{1/2}$: 14°
Field angle(1/10peak) $\theta_{1/10}$: 37° x 57°
- Control
International DMX512, 3 pins(optional 5 pins) interface
Standard mode 10 channels and extended mode 23 channels
Master-slave mode, stand-alone mode, test mode
16 Preset memories, 16 user memories
Preset memories and user memories can be loaded by control channels, 16 level speeds adjustable
- Other Functions
LED board temperature display
Fixture usage time display
Brightness level control
Timer control
DMX mode, setting status, operation mode and user memory data can be transmitted by synchronous control
DMX512 wireless receiver(optional)
DMX512 wireless transmitter(optional)

- Physical
Housing: high-intensity die-casting aluminum, IP67
Ambient working temperature: -20°C~40°C
- Weight
Net weight: 46kg
- Packaging
Standard: carton 1095x520x532(mm)
Optional: flight case
- Accessories
G clamp, 2 pcs
XLR cable, 1 pc
Safety cord, 1pc
Optional: omega clamp, 2 pcs

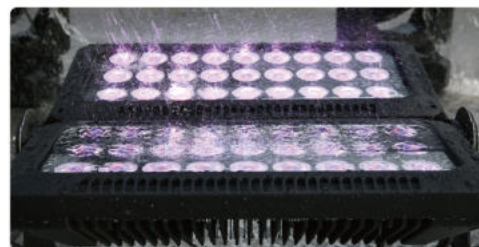

CUBIX 500

Model: PR-6600




RoHS | CE | LED | $\sim 1.5\text{m}$ | IP65 | $T_c 150^\circ\text{C}$ | $T_a 40^\circ\text{C}$ | 

This is a high temperature resistant and high-brightness luminaire, equipped with a 250W LED lamp. It features color wheel, gobo wheel, animation flame effect wheel, two prisms, $8^\circ \sim 40^\circ$ zoom, rating IP65, etc. It's widely applied in urban buildings lighting, landscape lighting and other multi- scale of locations.

IP65, Gobo Effect



Scan with your Phone
to view more detail



18.5Kg
Size(mm)

Specifications

- Input Voltages
100V~240V AC, 50/60Hz
- Power Consumption
350W@220V
- Light Source
250W white LED(6,500k), 50,000 hrs
- Strobe
Electronic strobe, 0-25 F.P.S(preset pulse strobe effect)
- Dimmer
0-100% linear adjustment
- Colors
1 Color wheel: 7 dichroic color filters(with CTO) plus open
Half color effect, rainbow effect and variable speeds
Stepping/linear color changing
- Gobos
1 Rotating gobo wheel: 7 gobos plus open, gobos can be fixed
Shaking at variable speed and bi-directional scrolling effect
- Prism
Two prisms(3-facet prism and 4-facet prism), bi-directionally rotating
- Effect
1 Flame effect wheel, with bi-directional rotation, animation wheel is replaceable
- Light Angle
Beam angle(1/2 peak) $\theta_{1/2}$: 8°~40°
- Focus
DMX linear focus
- Zoom
DMX linear zoom
- Control
International DMX512, 3 pins(optional 5 pins) interface
Short mode 14 channels, standard mode 17 channels, and extended mode 19 channels
Master-slave mode
Preset memories and user memory mode
- Other Functions
LCD panel
Over temperature protection
Fast and convenient software upgrade via DMX512 interface
- Physical
Housing: high-intensity die-casting aluminum, IP65
Ambient working temperature: -20°C~40°C
- Weight
Net weight: 18.5kg
- Packaging
Standard: carton 610x385x355(mm)
Optional: flight case 830x555x320(mm), 2 in 1
- Accessories
C clamp, 1 pc
Signal adapter cord, 2 pcs
Power cord, 1 pc
Safety cord, 1 pc



TANGO Spot

Model: PR-6610

RoHS | CE | LED | 1.5m | IP65 | T_c150°C | T_a40°C |




TANGO Spot is a new launched outdoor powerful spot fixture, equipped with 620W bright white LED source. With precise control, 8°~56° wide zoom and multi dynamic effects. It's ideal for urban buildings lighting, landscape lighting and other multi-scale of locations.

IP65, LED Spot, Wash Effect



Scan with your Phone
to view more detail

Rotating gobos(Ø37.5mm, image Ø26mm)



37.2Kg
Size(mm)

Specifications

- Input Voltages
100-240V AC, 50/60Hz
- Power Consumption
800W@230V
- Light Source
Atria 620W LED white(7,000K), 20,000 hrs
- Strobe
Electronic strobe, 0.3-25 F.P.S
- Dimmer
0-100% linear adjustment
- Colors
1 Color wheel: 6 dichroic color filters plus open
Half color effect, rainbow effect with bi-directional and variable speeds
Stepping/linear color changing
- CTO
0-100% linear CTO system
- Gobo
1 Rotating gobo wheel: 6 replaceable gobos plus open, glass and metal gobos can be fixed
Bi-directionally rotating, index, shaking at variable speed and bi-directional scrolling effect
- Prism
Two prisms(4-facet and 6-facet array prisms)
Optional: 3-facet, coloured prism, 4-facet gradient prism
Bi-directionally rotating at variable speed, indexable
- Effect
Dual effect wheel, independent bi-directional rotation at variable speeds
Shaking effect at variable speeds
- Iris
5-100% linear adjustment with macros
- Focus
DMX linear focus
- Zoom
DMX linear zoom
- Light Angle
8°~56°
- Control
International DMX512, 3 pins(optional 5 pins) interface
RDM control protocol
Short mode 18 channels, standard mode 21 channels, extended mode 23 channels
Master-slave mode, stand-alone mode, test mode
- Other Functions
Lamp and total hours displayed
Over temperature protection
Fast and convenient software upgrade via DMX512 interface
Input signal isolation
Modular structure for easy maintenance
DMX512 wireless receiver
DMX512 wireless transmitter(optional)
- Physical
Housing: high-intensity die-casting aluminum, IP65
Ambient working temperature: 40°C
- Weight
Net weight: 37.2kg
- Packaging
Standard: carton 760x690x770(mm)
Optional: flight case 650x402x836(mm)
- Accessories
G clamp, 2 pcs
Power cord, 1 pc
Safety cord, 2 pcs
Signal adapter cord, 2 pcs



TANGO Framing

Model: PR-6611

RoHS | CE | LED | 1.5m | IP65 | T_c150°C | T_a40°C |



TANGO Framing is a new launched outdoor powerful profile fixture, equipped with 620W bright white LED source. With precise control, 8°~56° wide zoom and multi dynamic effects. It's ideal for urban buildings lighting, landscape lighting and other multi-scale of locations.

IP65, LED Framing



Scan with your Phone
to view more detail

Rotating gobos(Ø37.5mm, image Ø26mm)



37.2Kg
Size(mm)

Specifications

- Input Voltages
100-240V AC, 50/60Hz
- Power Consumption
800W@230V
- Light Source
Atria 620W LED white(7,000K), 20,000 hrs
- Strobe
Electronic strobe, 0.3-25 F.P.S
- Dimmer
0-100% linear adjustment
- Colors
2 Color wheel: 12 dichroic color filters plus open
Half color effect, rainbow effect with bi-directional and variable speeds
Stepping/linear color changing
- CTO
0-100% linear CTO system
- Gobo
1 Rotating gobo wheel: 6 replaceable gobos plus open, glass and metal gobos can be fixed
Bi-directionally rotating, index, shaking at variable speed and bi-directional scrolling effect
- Prism
Two prisms(4-facet and 6-facet prisms)
Optional: 3-facet, coloured prism, 4-facet, gradient prism
Bi-directionally rotating at variable speed, indexable
- Effect
Dual effect wheel, independent bi-directional rotation at variable speeds
Shaking effect at variable speeds
- Framing
4 Framing module continual framing module rotation, 4 framing blades to make full curtain effect
- Iris
5-100% linear adjustment with macros
- Focus
DMX linear focus
- Zoom
DMX linear zoom
- Light Angle
8°~56°
- Control
International DMX512, 3 pins(optional 5 pins) interface
RDM control protocol
Short mode 26 channels, standard mode 29 channels, extended mode 38 channels
Master-slave mode, stand-alone mode, test mode
- Other Functions
Lamp and total hours displayed
Over temperature protection
Fast and convenient software upgrade via DMX512 interface
Input signal isolation
Modular structure for easy maintenance
DMX512 wireless receiver
DMX512 wireless transmitter(optional)
- Physical
Housing: high-intensity die-casting aluminum, IP65
Ambient working temperature: 40°C
- Weight
Net weight: 37.2kg
- Packaging
Standard: carton 760x690x770(mm)
Optional: flight case 650x402x836(mm)
- Accessories
G clamp, 2 pcs
Power cord, 1 pc
Safety cord, 2 pcs
Signal adapter cord, 2 pcs



CUBIX 300

Model: PR-6803


RoHS | CE | LED | 1.5m | IP65 | T_c150°C | T_a40°C | 

CUBIX 300 is a new launched exterior gobo projector, equipped with a 150W bright white LED source. With precise control, 15°~45° wide zoom, small and light weight.

IP65, Gobo effect



Scan with your Phone
to view more detail

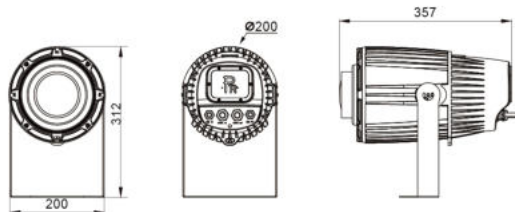

9.5Kg
Size(mm)

Specifications

- Input Voltages
100V~240V AC,50/60Hz
- Power Consumption
170W@230V
- Light Source
150W LED white(7,500k), 50,000 hrs
- Strobe
Electronic strobe, 0-25 F.P.S(preset pulse strobe effect)
- Dimmer
0-100% linear adjustment
- Colors
1 Color wheel: 5 dichroic color filters plus open
Continual rotation, magnet sensor positioning
- Gobo
1 Rotating gobo wheel: 4 gobos
- Light Angle
Field angle: 15°~45°
- Control
International DMX512, 3 pins(optional 5 pins) interface
Master-slave synchronized mode, stand-alone mode, preset mode, test mode, and single scene mode
DMX mode, preset memories and user memory mode
- Other Functions
LCD panel
Over temperature protection
Fast and convenient software upgrade via DMX512 interface
Built in NTC temperature detecting function, If LED lamp is over heat, its power will be decreased intelligently
DMX 512 wireless receiver(optional)
DMX 512 wireless transmitter(optional)
- Physical
Housing: high-intensity die-casting aluminum, IP65
Ambient working temperature: -20°C~40°C
- Weight
Net weight: 9.5kg
- Packaging
Standard: carton 340x335x440(mm)
Optional: flight case N/A
- Accessories
C clamp, 1 pc
Signal adapter cord, 2 pcs
Power cord, 1 pc
Safety cord, 1 pc
Optional: transparent cover+seal+screws x6, 1set



LS 150/90 Logo

Model: PR-6831/6830


RoHS | CE | LED | 1.5m | IP65 | T_c150°C | T_a45°C | 

LS 150/90 Logo is a high temperature resistant and high-brightness luminaire, equipped with a 150W(optional 90W) LED lamp. It features one color wheel and one flame animation effect wheel, combined with 35 ° light angle, super-fast strobe, rating IP65, etc. It's widely applied in urban buildings lighting, landscape lighting and other multi- scale of locations.

IP65, Logo Effect



Scan with your Phone
to view more detail



7.5Kg
Size(mm)

Specifications

- **Input Voltages**
100V~240V AC,50/60Hz
- **Power Consumption**
LS 150 Logo(PR-6831):160W@230V
LS 90 Logo(PR-6830): 100W@230V
- **Light Source**
LS 150 Logo(PR-6831):150W LED white(7,500k), 50,000 hrs
LS 90 Logo(PR-6830): 90W LED white(7,500k), 50,000 hrs
- **Strobe**
Electronic strobe, 0-25 F.P.S(pulse strobe effect)
- **Dimmer**
0-100% linear adjustment
- **Colors**
1 Color wheel: 5 dichroic color filters plus open
Continual rotation, magnet sensor positioning
- **Gobos**
1 Customized gobo
- **Light Angle**
Beam angle: 30°
- **Control**
International DMX512, 3 pins(optional 5 pins) interface
Master-slave synchronized mode, stand-alone mode, preset mode, test mode, and single scene mode
DMX mode, preset memories and user memory mode
- **Other Functions**
LCD panel
Over temperature protection
Fast and convenient software upgrade via DMX512 interface
Built in NTC temperature detecting function, If LED lamp is over heat, its power will be decreased intelligently
- **Physical**
Housing: high-intensity die-casting aluminum, IP65
Ambient working temperature: -20°C~45°C
- **Weight**
Net weight: 7.5kg
- **Packaging**
Standard: carton 1034x706x468(mm)
Optional: flight case
- **Accessories**
C clamp, 1 pc
Signal adapter cord, 2 pcs
Power cord, 1 pc
Safety cord, 1 pc
Optional: transparent cover+ seal+ screws x6, 1set



XPAR 150 Zoom

Model: PR-8203

RoHS | CE | WDMX | LED | 10m | IP67 | T_c150°C | T_a40°C | 

The XPAR 150 Zoom is an exceptionally compact and lightweight lighting fixture designed for extreme outdoor environment, such as building facades, landscaping, and so on. It features with multichip COB LED and linear zoom, ideal for applications requiring superb color mixing (RGBW) or high quality white light.



IP67, COB, Zoom



Scan with your Phone
to view more detail



Optional



7.5Kg
Size(mm)

Specifications






- Input Voltages
100-240V AC, 50/60Hz
- Power Consumption
200W@220V
- Light Source
1 COB 150W LED (RGBW 4 in 1), 50,000 hrs
- Strobe
Electronic strobe, 0.5-33 F.P.S
- Dimmer
0-100% linear adjustment
- Colors
R/G/B/W linear color mixing, with macro
- Light Angle
Field angle(1/10 peak): 22°~55°
- Control
International DMX512, 3 pins(optional 5 pins) interface
Standard mode 7 channels and extended mode 12 channels
Master-slave mode
DMX control mode, user memory mode, preset memory mode
Test mode
- Other Functions
LED lamp board temperature and fixture time available in the menus
DMX channel mode and settings displayed
LCD and inverted display
Display backlight automatically shut off after delay
Parameters like operation mode and etc. transmitted under synchronization
DMX512 wireless receiver
DMX512 wireless transmitter(optional)
- Physical
Housing: high intensity die-casting alloy, IP67
Ambient working temperature: -20°C~40°C

- Weight
Net weight: 7.5kg
- Packaging
Standard: carton 595x355x320(mm)
Optional: flight case 940x465x465(mm), 6 in 1
- Accessories
C clamp, 1 pc
Safety cord, 1 pc
Signal adapter cable, 2 pcs
Power adapter cable, 1 pc
Optional: barndoor, 1 set




ARC LED 372

Model: PR-8805

RoHS | CE |  |  WDMX | LED |  1.5m |  IP₆₇ | T_c150°C | T_a45°C | 

ARC LED 372 is a new launched architectural light, contains 72 pcs of 3W OSRAM LEDs (R/G/B/W each 18 pcs). It's equipped with 5° lens, delivers 4.5°(optional: 30°, 40°) narrow beam light.

IP67, RGBW

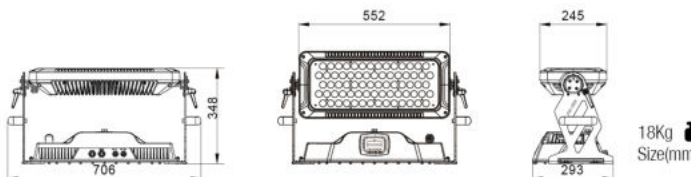

Specifications

- Input Voltages
100-240V AC, 50/60Hz
- Power Consumption
230W@230V
- Light Source
72x3W(18R+18G+18B+18W), 50,000 hrs
- Strobe
Electronic strobe, 0.5-33 F.P.S
- Dimmer
0-100% linearly adjustable
- Colors
R/G/B/W and color mixing, with macro
- Light Angle
Beam angle(1/2 peak) $\theta_{1/2}$: 4.5°, (optional: 30°, 40°)
- Control
International DMX512, 3 pins(optional 5 pins) interface
Standard mode 6 channels, extended mode 11 channels,
HSI color phase saturation mode 5 channels and HSIC color
phase saturation color temperature mode 6 channels
Master-slave mode, test mode
DMX mode, preset memory mode and user memory mode
- Other Functions
LED board temperature display
Fixture usage time display
Brightness level control
Timer control
Parameters like operation mode and etc. transmitted under
synchronization
RDM protocol
- Physical
Housing: high-intensity die-casting aluminum, IP67
Ambient working temperature: -20°C~45°C
- Weight
Net weight: 18kg
- Packaging
Standard: carton 795x530x420(mm)
Optional: flight case 900x760x430(mm), 2 in 1
- Accessories
G clamp, 2 pcs
Signal adapter cord, 2 pcs
Safety cord, 1pc
Optional: barndoor 1 set; transparent water proof
panel+seal+screwsx8

