

## EP-830 Single Earphone



### Features

- Used with interpretation receiver or on a conference unit
- Hi-Fi sound quality
- Assembled with detachable shell, cable and earphone
- The shell can be removed and cleaned separately
- The cable can be replaced separately by customer if breaks
- Ø 3.5 mm stereo plug (TRS)
- 32 Ohm (Tip and Sleeve, Ring: NC)
- Frequency response: 20 Hz to 20 kHz
- Sensitivity: ≥108 dBA/1 mW
- Weight: ≤25 g

### Ordering Information

EP-830.....Single Earphone (can be disassembled, TRS connector, Ring: NC)

## EP-820AS Single Earphone



### Features

- Used with the receiver or a conference unit
- Excellent sound quality
- Ø 3.5 mm stereo plug (TRS)
- 32 Ohm (Tip and Sleeve, Ring: NC)
- Frequency response: 50 Hz to 20 kHz
- Sensitivity: ≥102 dBA/1 mW
- Weight: 20 g

### Ordering Information

EP-820AS.....Single Earphone (TRS connector, Ring: NC)

## EP-822 Single Inner Earphone



### Features

- Used with the receiver or a conference unit
- Excellent sound quality
- Ø 3.5 mm stereo plug (TRS)
- 16 Ohm (Tip and Sleeve, Ring: NC)
- Frequency response: 20 Hz to 20 kHz
- Sensitivity: ≥90 dBA/1 mW
- Weight: 7 g

### Ordering Information

EP-822.....Single Inner Earphone  
(TRS connector, Ring: NC)

## EP-823L Single Earphone



### Features

- Used with the receiver or a conference unit
- Excellent sound quality
- For the left ear
- Ø 3.5 mm stereo plug (TRS)
- 32 Ohm (Tip and Sleeve, Ring: NC)
- Frequency response: 20 Hz to 20 kHz
- Sensitivity: ≥103 dBA/1 mW
- Weight: 20 g

### Ordering Information

EP-823L.....Single Earphone (left, TRS connector, Ring: NC)

## EP-823R Single Earphone



### Features

- Used with the receiver or a conference unit
- Excellent sound quality
- For the right ear
- Ø 3.5 mm stereo plug (TRS)
- 32 Ohm (Tip and Sleeve, Ring: NC)
- Frequency response: 20 Hz to 20 kHz
- Sensitivity: ≥103 dBA/1 mW
- Weight: 20 g

### Ordering Information

EP-823L.....Single Earphone (right, TRS connector, Ring: NC)

## EP-829 Single Earphone

### Features

- Used with the receiver or a conference unit
- Excellent sound quality
- Earshell is detachable and washable, convenient for cleaning
- Ø 3.5 mm stereo plug (TRS)
- 32 Ohm (Tip and Sleeve, Ring: NC)
- Frequency response: 20 Hz to 20 kHz
- Sensitivity: ≥108 dBA/1 mW
- Weight: 35 g

### Ordering Information

EP-829.....Single Earphone (ear pads can be striped, TRS connector, Ring: NC)

## EP-960AN Interpreter Headset



### Features

- Incorporated with interpreter unit for monitoring and speaking
- Excellent sound quality
- Interpreters can wear the headset according to their habits
- One sided wire, provide better user experience
- Greater headband adjustability, suitable for all the users
- 150 Ohm × 2, Ø 3.5 mm TRRS plug
- Frequency response of headphone: 20 Hz to 20 kHz
- Sensitivity of headphone: ≥108 dBA/1 mW
- Polar pattern of microphone: Omnidirectional
- Frequency response of microphone: 50 Hz to 20 kHz
- Sensitivity of microphone: -48 dBV/Pa
- Impedance of microphone: <680 Ohm
- Weight: 95 g

### Ordering Information

EP-960AN.....Interpreter Headset (TRRS plug, stereo, for HCS-8385/80, including a pair of EP-960HD Detachable Earshells)

## EP-960AH Interpreter Headset



### Features

- Incorporated with interpreter unit for monitoring and speaking
- Excellent sound quality
- Interpreters can wear the headset according to their habits
- One sided wire, provide better user experience
- Greater headband adjustability, suitable for all the users
- 150 Ohm × 2, Ø 3.5 mm stereo plug (TRS) for headphone
- Ø 3.5 mm stereo plug (TRS, Ring: NC) for microphone
- Frequency response of headphone: 20 Hz to 20 kHz
- Sensitivity of headphone: ≥108 dBA/1 mW
- Polar pattern of microphone: Omnidirectional
- Frequency response of microphone: 50 Hz to 20 kHz
- Sensitivity of microphone: -48 dBV/Pa
- Impedance of microphone: <680 Ohm
- Weight: 109 g

### Ordering Information

EP-960AH.....Interpreter Headset (stereo, for HCS-4385U/50, including a pair of EP-960HD Detachable Earshells)

## EP-960BH Interpreter Headphones



### Features

- Incorporated with interpreter unit for monitoring
- Excellent sound quality
- One sided wire, provide better user experience
- Greater headband adjustability, suitable for all the users
- 150 Ohm × 2, Ø 3.5 mm stereo plug (TRS) for headphone
- Frequency response of headphone: 20 Hz to 20 kHz
- Sensitivity of headphone: ≥108 dBA/1 mW
- Weight: 90 g

### Ordering Information

EP-960BH.....Interpreter Headphones (stereo, including a pair of EP-960HD Detachable Earshells)

## HCS-5100PA Headphones



### Features

- Used with the receiver or a conference unit
- Excellent sound quality
- 32 Ohm × 2, Ø 3.5 mm stereo plug (TRS)
- Frequency response: 20 Hz to 20 kHz
- Sensitivity: ≥108 dBA/1 mW
- Weight: 70 g

### Ordering Information

HCS-5100PA.....Headphones

## Sponge Ear Pads



### Features

- Used for headphone
- 50 pairs per package
- Color: black

### Ordering Information

Sponge Ear Pads for HCS-5100PA.....Sponge Ear Pads  
(thick, for new HCS-5100PA, 50 pairs/package)

EP-960SP-L.....Sponge Ear Pads (Ø 70 mm,  
for EP-960 series headset, 10 pairs/package)

EP-960SP-S.....Sponge Ear Pads (Ø 58 mm,  
for EP-960 series headset, 10 pairs/package)

## EP-960HD Detachable Earshells



### Features

- Used for EP-960 series headset
- Earshell is detachable and washable, convenient for cleaning
- Color: black

### Ordering Information

EP-960HD.....Detachable Earshells for EP-960  
(for EP-960 series headset, 1 pair)

## HCS-1020 Clip Microphone



### Features

- Stylish and ergonomic design
- Excellent immunity to RF interferences from mobile phones
- Ø 3.5 mm stereo plug with a 1.5-meter cable

### Technical Specifications

#### Electrical

Transducer.....Electret-condenser  
Polar pattern.....Uni-directional  
Operating voltage.....5 VDC  
Sensitivity.....-46 dBA at 680 Ohm (0 dB = 1 V/Pa at 1 kHz)  
Frequency response.....30 Hz to 20 kHz  
Input impedance.....2 kOhm  
Directivity 0°/180°.....> 20 dB (1 kHz)  
Equivalent noise.....20 dBA (SPL)  
Maximum sound pressure level.....125 dB (THD<3%)

#### Mechanical

Dimensions (h x w x d).....51 x 25 x 13 mm  
Weight.....3 g  
Color.....Black

### Ordering Information

HCS-1020.....Clip Microphone


# MSxxEGB1 Stem Microphone




### Features

- Broadcast quality microphone
- With two-color illuminated ring (green/red)
- Built-in windshield
- For HCS-4100, HCS-5300 and HCS-8300 series Congress Unit
- 33 cm vision is standard stem microphone for HCS-8300 series Paperless Multi-media Congress Terminal and HCS-5300 series Wireless Conference Unit and HCS-4385U/50, HCS-8385/80 Interpreter Unit
- 41 cm vision is standard stem microphone for HCS-4100 series Congress Unit (except HCS-4385U/50)

### Polar pattern

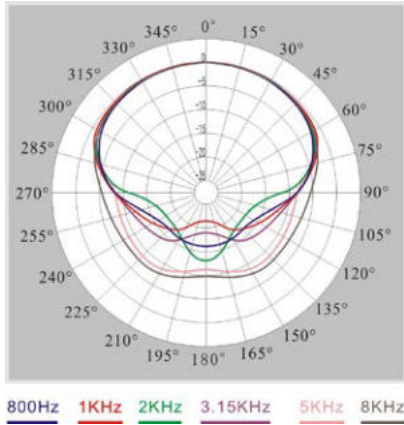

### Frequency response

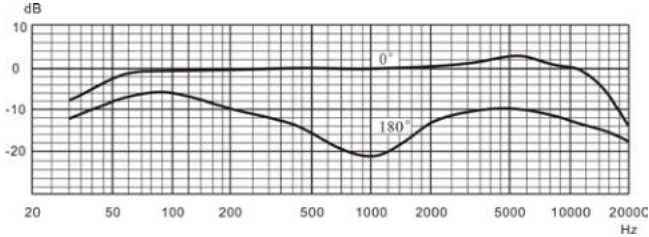

### Technical Specifications

#### Electrical

- Transducer.....Electret-condenser  
 Polar pattern.....Uni-directional  
 Operating voltage.....5 VDC  
 Sensitivity.....-46 dBA at 680 Ohm (0 dB = 1 V/Pa at 1 kHz)  
 Frequency response.....50 Hz to 20 kHz  
 Input impedance.....2 kOhm  
 Directivity 0°/180°.....> 20 dB (1 kHz)  
 Equivalent noise.....20 dBA (SPL)  
 Maximum sound pressure level.....125 dB (THD<3%)

#### Mechanical

- Length.....33 cm, 41 cm, 47 cm  
 Weight.....88 g, 95 g, 100 g  
 Color.....Champagne (PANTONE 401 C)  
 / Black (PANTONE 419 C)

### Ordering Information

- MS33EGB1S.....Stem Microphone (33 cm, broadcast quality microphone, with two-color illuminated ring, built-in windshield, for HCS-4100, HCS-5300 and HCS-8300 series, champagne)
- MS33EGB1B.....Stem Microphone (33 cm, broadcast quality microphone, with two-color illuminated ring, built-in windshield, for HCS-4100, HCS-5300 and HCS-8300 series, black)
- MS41EGB1S.....Stem Microphone (41 cm, broadcast quality microphone, with two-color illuminated ring, built-in windshield, for HCS-4100, HCS-5300 and HCS-8300 series, champagne)
- MS41EGB1B.....Stem Microphone (41 cm, broadcast quality microphone, with two-color illuminated ring, built-in windshield, for HCS-4100, HCS-5300 and HCS-8300 series, black)
- MS47EGB1S.....Stem Microphone (47 cm, broadcast quality microphone, with two-color illuminated ring, built-in windshield, for HCS-4100, HCS-5300 and HCS-8300 series, champagne)
- MS47EGB1B.....Stem Microphone (47 cm, broadcast quality microphone, with two-color illuminated ring, built-in windshield, for HCS-4100, HCS-5300 and HCS-8300 series, black)


# MSxxEGF1 Stem Microphone




## Features

- Broadcast quality microphone
- With two-color illuminated ring (green/red)
- With lockable windshield
- For HCS-4100/50, HCS-5300 and HCS-8300 series Congress Unit
- Optional

## Polar pattern

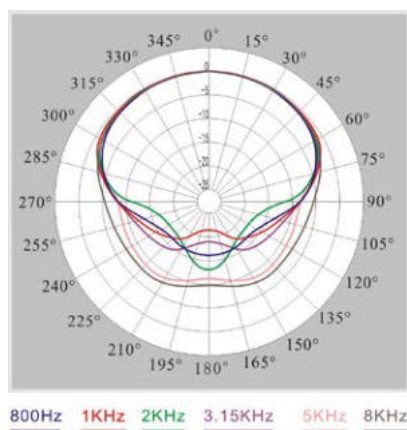

## Frequency response

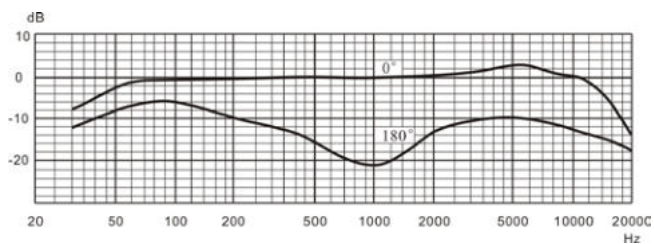

## Technical Specifications

### Electrical

Transducer..... Electret-condenser  
 Polar pattern..... Uni-directional  
 Operating voltage..... 5 VDC  
 Sensitivity..... -46 dBA at 680 Ohm (0 dB = 1 V/Pa at 1 kHz)  
 Frequency response..... 50 Hz to 20 kHz  
 Input impedance..... 2 kOhm  
 Directivity 0°/180°..... > 20 dB (1 kHz)  
 Equivalent noise..... 20 dBA (SPL)  
 Maximum sound pressure level..... 125 dB (THD<3%)

### Mechanical

Length..... 33 cm, 41 cm, 47 cm  
 Weight..... 85 g, 95 g, 105 g  
 Color..... Champagne (PANTONE 401 C)  
   / Black (PANTONE 419 C)

## Ordering Information

- MS33EGF1S ..... Stem Microphone (33 cm, broadcast quality microphone, with two-color illuminated ring and lockable windshield, for HCS-4100, HCS-5300 and HCS-8300 series, optional, champagne)
- MS33EGF1B ..... Stem Microphone (33 cm, broadcast quality microphone, with two-color illuminated ring and lockable windshield, for HCS-4100, HCS-5300 and HCS-8300 series, optional, black)
- MS41EGF1S ..... Stem Microphone (41 cm, broadcast quality microphone, with two-color illuminated ring and lockable windshield, for HCS-4100, HCS-5300 and HCS-8300 series, optional, champagne)
- MS41EGF1B ..... Stem Microphone (41 cm, broadcast quality microphone, with two-color illuminated ring and lockable windshield, for HCS-4100, HCS-5300 and HCS-8300 series, optional, black)
- MS47EGF1S ..... Stem Microphone (47 cm, broadcast quality microphone, with two-color illuminated ring and lockable windshield, for HCS-4100, HCS-5300 and HCS-8300 series, optional, champagne)
- MS47EGF1B ..... Stem Microphone (47 cm, broadcast quality microphone, with two-color illuminated ring and lockable windshield, for HCS-4100, HCS-5300 and HCS-8300 series, optional, black)


## MSxxEGE1 Stem Microphone




### Features

- Broadcast quality microphone
- With two-color illuminated ring (green/red)
- Built-in windshield
- For HCS-3900 series Congress Unit
- 41 cm version is standard stem microphone for HCS-3900 series Congress Unit (except HCS-3938CF/HCS-3938DF)

### Polar pattern

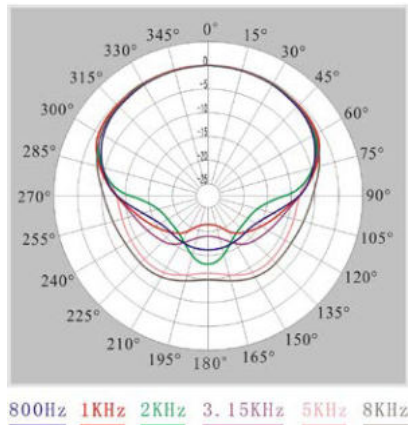

### Frequency response

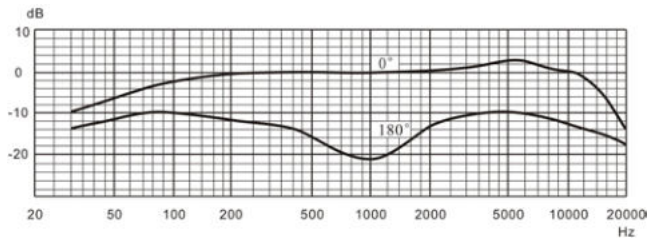

### Technical Specifications

#### Electrical

Transducer.....Electret-condenser  
 Polar pattern.....Uni-directional  
 Operating voltage.....5 VDC  
 Sensitivity.....-46 dBA at 680 Ohm (0 dB = 1 V/Pa at 1 kHz)  
 Frequency response.....50 Hz to 20 kHz  
 Input impedance.....2 kOhm  
 Directivity 0°/180°.....> 20 dB (1 kHz)  
 Equivalent noise.....20 dBA (SPL)  
 Maximum sound pressure level.....125 dB (THD<3%)

#### Mechanical

Length.....33 cm, 41 cm, 47 cm  
 Weight.....85 g, 95 g, 105 g  
 Color.....Champagne (PANTONE 401 C)  
   / Black (PANTONE 419 C)

### Ordering Information

- MS33EGE1S.....Stem Microphone (33 cm, with two-color illuminated ring and lockable windshield, for HCS-3900 series, champagne)
- MS33EGE1B.....Stem Microphone (33 cm, with two-color illuminated ring, built-in windshield, for HCS-3900 series, black)
- MS41EGE1S.....Stem Microphone (41 cm, with two-color illuminated ring, built-in windshield, for HCS-3900 series, champagne)
- MS41EGE1B.....Stem Microphone (41 cm, with two-color illuminated ring, built-in windshield, for HCS-3900 series, black)
- MS47EGE1S.....Stem Microphone (47 cm, broadcast quality microphone, with two-color illuminated ring, built-in windshield, for HCS-3900 series, champagne)
- MS47EGE1B.....Stem Microphone (47 cm, broadcast quality microphone, with two-color illuminated ring, built-in windshield, for HCS-3900 series, black)




# MSxxEGB2B Stem Microphone




## Features

- With dual-flex gooseneck arm
- Broadcast quality microphone
- With two-color illuminated ring (green/red)
- Built-in windshield
- For HCS-4100/50, HCS-5300 and HCS-8300 series Conference Unit

## Polar pattern

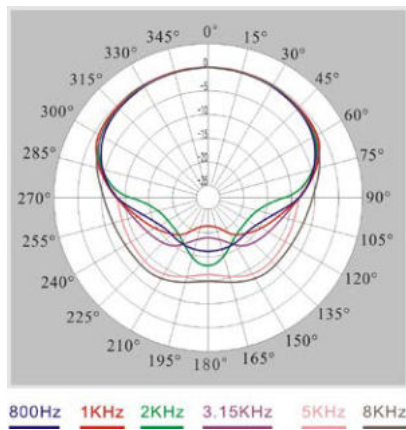

## Frequency response

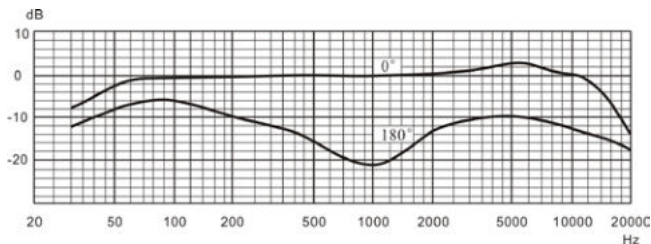

## Technical Specifications

### Electrical

Transducer.....Electret-condenser  
 Polar pattern.....Uni-directional  
 Operating voltage.....5 VDC  
 Sensitivity.....-46 dBA at 680 Ohm (0 dB = 1 V/Pa at 1 kHz)  
 Frequency response.....50 Hz to 20 kHz  
 Input impedance.....2 kOhm  
 Directivity 0°/180°.....> 20 dB (1 kHz)  
 Equivalent noise.....20 dBA (SPL)  
 Maximum sound pressure level.....125 dB (THD<3%)

### Mechanical

Length.....50 cm, 60 cm, 70 cm  
 Color.....Black (PANTONE 419 C)

## Ordering Information

- MS50EGB2B.....Stem Microphone (50 cm, dual-flex gooseneck arm, broadcast quality microphone, with two-color illuminated ring, built-in windshield, for HCS-4100, HCS-5300 and HCS-8300 series, black)
- MS60EGB2B.....Stem Microphone (60 cm, dual-flex gooseneck arm, broadcast quality microphone, with two-color illuminated ring, built-in windshield, for HCS-4100, HCS-5300 and HCS-8300 series, black)
- MS70EGB2B.....Stem Microphone (70 cm, dual-flex gooseneck arm, broadcast quality microphone, with two-color illuminated ring, built-in windshield, for HCS-4100, HCS-5300 and HCS-8300 series, black)




# MSxxEGH2B Stem Microphone




## Features

- With dual-flex gooseneck arm
- Broadcast quality microphone
- Built-in windshield
- For HCS-4100/50, HCS-5300 and HCS-8300 series Conference Unit

## Polar pattern

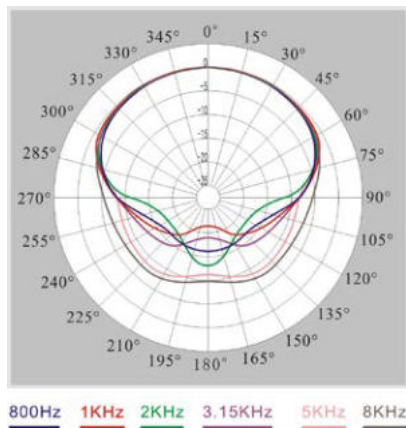

## Frequency response

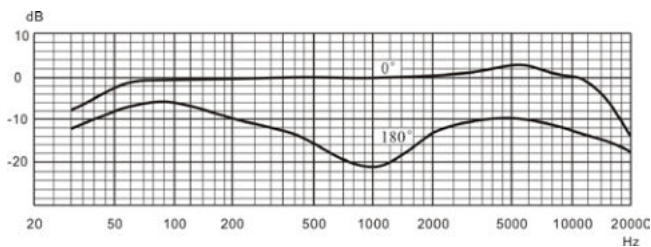

## Technical Specifications

### Electrical

Transducer.....Electret-condenser  
 Polar pattern.....Uni-directional  
 Operating voltage.....5 VDC  
 Sensitivity.....-46 dBA at 680 Ohm (0 dB = 1 V/Pa at 1 kHz)  
 Frequency response.....50 Hz to 20 kHz  
 Input impedance.....2 kOhm  
 Directivity 0°/180°.....> 20 dB (1 kHz)  
 Equivalent noise.....20 dBA (SPL)  
 Maximum sound pressure level.....125 dB (THD<3%)

### Mechanical

Length.....50 cm, 60 cm, 70 cm  
 Color.....Black (PANTONE 419 C)

## Ordering Information

- MS50EGH2B..... Stem Microphone (50 cm, dual-flex gooseneck arm, broadcast quality microphone, built-in windshield, for HCS-4100, HCS-5300 and HCS-8300 series, black)
- MS60EGH2B..... Stem Microphone (60 cm, dual-flex gooseneck arm, broadcast quality microphone, built-in windshield, for HCS-4100, HCS-5300 and HCS-8300 series, black)
- MS70EGH2B..... Stem Microphone (70 cm, dual-flex gooseneck arm, broadcast quality microphone, built-in windshield, for HCS-4100, HCS-5300 and HCS-8300 series, black)


## MS33EGBSS Stem Microphone




### Features

- With flexible gooseneck arm
- Broadcast quality microphone
- With two-color illuminated ring (green/red)
- Built-in windshield
- For HCS-4385U/50 and HCS-8385/80 interpreter unit

### Polar pattern

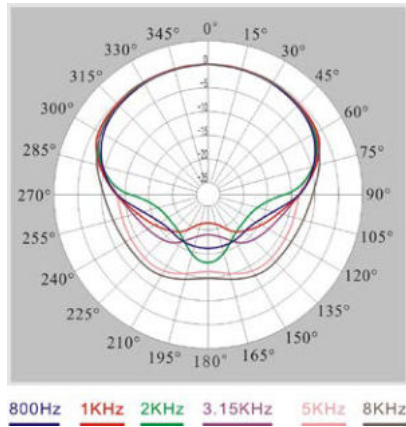

### Frequency response

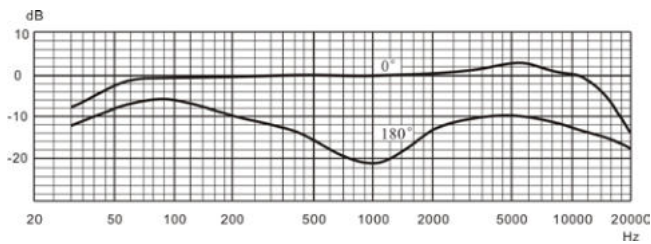

### Technical Specifications

#### Electrical

Transducer.....Electret-condenser  
 Polar pattern..... Uni-directional  
 Operating voltage.....5 VDC  
 Sensitivity.....-46 dBA at 680 Ohm (0 dB = 1 V/Pa at 1 kHz)  
 Frequency response.....50 Hz to 20 kHz  
 Input impedance.....2 kOhm  
 Directivity 0°/180°.....> 20 dB (1 kHz)  
 Equivalent noise.....20 dBA (SPL)  
 Maximum sound pressure level.....125 dB (THD<3%)

### Mechanical

Length.....33 cm  
 Color.....Champagne (PANTONE 401 C)

### Ordering Information

MS33EGBSS.....Stem Microphone (33 cm, flexible gooseneck arm, broadcast quality microphone, with two-color illuminated ring, built-in windshield, for interpreter unit, champagne)

## Windshield - lockable



### Features

- Lockable windshield
- For EGF series stem microphone
- Optional
- Color: gray (PANTONE 446 C) / black (PANTONE 419 C)

### Ordering Information

Lockable Windshield\_G.....Lockable Windshield (optional, gray)  
 Lockable Windshield\_B.....Lockable Windshield (optional, black)

## MIC-SK-V Stem Microphone Fixing Base



---

### Features

- Fix 5P E type stem microphone on the desk
- 6P mini DIN interface with 1.0-meter cable

---

### Technical Specifications

#### Mechanical

Dimensions (diameter × h).....Ø 50 × 22 mm

Weight.....0.1 kg

Color.....Brown (PANTONE 1685 U)

---

### Ordering Information

MIC-SK-V.....Stem Microphone Fixing Base (tabletop)

**HCS-ADP48V Power Adapter**



**Features**

- Used for supplying power to HCS-8368T/50

**Technical Specifications**

**Electrical**

Power supply.....AC 100 V - 240 V, 50 Hz / 60 Hz  
 Output.....48 V DC, 1.875 A  
 Connector.....UL, CE or VDE type, according to the sales area

**Mechanical**

Cable length.....3 m  
 Dimensions (h x w x d).....33 x 150 x 62 mm  
 Weight.....0.5 kg  
 Color.....Black

**Ordering Information**

HCS-ADP48V.....Power Adapter (48 V DC, 1.875 A,  
 for HCS-8368T/50)

**TES-ADP5V Power Adapter**



**Features**

- Used for charging HCS-1081/50 wireless E-ink Electronic Nameplate

**Technical Specifications**

**Electrical**

Power supply.....AC 100 V - 240 V, 50 Hz / 60 Hz  
 Output.....5 V DC, 2.0 A  
 Connector.....UL, CE or VDE type, according to the sales area

**Mechanical**

Cable length.....1 m  
 Dimensions (h x w x d).....43 x 39 x 27 mm  
 Weight.....50 g  
 Color.....White

**Ordering Information**

TES-ADP5V.....Power Adapter (5 V DC, 2.0 A, for  
 HCS-1081/50)

## CBL2SS 2-pin Cable for Conference System



### Features

- Connecting HCS-8300KMX with HCS-8300PM/HCS-8300PM2
- Standard connectors (2P aviation socket at each end)
- Length: 1 m

### Ordering Information

CBL2SS-01.....1 m 2-pin Cable (with two sockets)  
 CBL2SS-01CMP.....1 m 2-pin Cable (with two sockets, CMP)

## CBL4PK Power Adapter Cable



### Features

- For HCS-8300PM/HCS-8300PM2/HCS-8300KMX - supplies power to HCS-8338 and HCS-8348 series Paperless Multi-media Congress Terminal
- Standard connectors (a 2P aviation socket at one end and a 4P-DIN socket at the opposite end)
- Length: 1 m

### Ordering Information

CBL4PK-01.....1 m Power Adapter Cable (for HCS-8300PM/PM2/KMX, supplies power to HCS-8338, HCS-8348)  
 CBL4PK-01CMP.....1 m Power Adapter Cable (for HCS-8300PM/PM2/KMX, supplies power to HCS-8338, HCS-8348, CMP)

## CBL4PS 4-pin Extension Cable



### Features

- Extension cable for connecting HCS-8338 and HCS-8348 series Paperless Multi-media Congress Terminal
- Standard connectors (a plug at one end and a socket at the opposite end)
- Optional: 5 m, 10 m, 20 m, 30 m, 40 m and 50 m available

### Ordering Information

CBL4PS-05CMP.....5 m 4-pin Extension Cable (with a plug and a socket, CMP)  
 CBL4PS-10CMP.....10 m 4-pin Extension Cable (with a plug and a socket, CMP)  
 CBL4PS-20CMP.....20 m 4-pin Extension Cable (with a plug and a socket, CMP)  
 CBL4PS-30CMP.....20 m 4-pin Extension Cable (with a plug and a socket, CMP)  
 CBL4PS-40CMP.....20 m 4-pin Extension Cable (with a plug and a socket, CMP)  
 CBL4PS-50CMP.....50 m 4-pin Extension Cable (with a plug and a socket, CMP)

## 4-pin Professional Extension Cable for Conference System



### Features

- For embedding system cables
- Conductor: 18AWGx4C

### Ordering Information

CBL4C-CMP.....Professional Extension Cable for Conference System (4-pin, 18AWGx4C, CMP)

## CBL4PT Power Branch Cable



### Features

- Power branch cable for "daisy-chain" supplying power to HCS-8338 and HCS-8348 series Paperless Multi-media Congress Terminal
- Input end: 4P-DIN plug
- Output end: 4P-DIN socket and a DC plug
- Length: 2 m

### Ordering Information

CBL4PT-02.....2 m Power Branch Cable (for HCS-8338 and HCS-8348 series Paperless Multi-media Congress Terminal)

CBL4PT-02CMP.....2 m Power Branch Cable (for HCS-8338 and HCS-8348 series Paperless Multi-media Congress Terminal, CMP)

## CBL-XLR2DIN-01 XLR to DIN Converting Cable



### Functions

- Used for external strong signal accessing to TAIDEN conference system
- XLR connector for external audio source input
- 6P mini DIN connector for connection to the HCS-4340HDA/50P Multi-function Connector
- Microphone On/Off button with illuminated ring
- Length: 1 m

### Ordering Information

CBL-XLR2DIN-01.....1 m XLR to DIN Converting Cable (HCS-4340HDA/50P needed)

## Professional Extension Cable for Conference System



### Features

- For embedding system cables
- Conductor: 4x2x(7x0.2)+96x0.12

### Ordering Information

S-UTP CABLE.....Professional Extension Cable for Conference System

FTP CABLE.....Professional Extension Cable for Conference System (CMP)

**CBL6PP 6-pin Extension Cable**



**Features**

- Connecting conference main units
- Standard connectors (6P-DIN plug at each end)
- Cable: S-UTP CABLE or FTP CABLE (CMP)
- Cable conductor: 4x2x(7x0.2)+96x0.12
- Length: 2 m
- Used for HCS-3900 series, HCS-4100/50 series and HCS-8300 series

**Ordering Information**

CBL6PP-02.....2 m 6-pin Extension Cable (with two plugs)  
 CBL6PP-02CMP.....2 m 6-pin Extension Cable (with two plugs, CMP)

**CBL6PS 6-pin Extension Cable**



**Features**

- Connecting conference main unit with contribution unit when cable extensions are needed
- Standard connectors (6P-DIN plug and 6P-DIN socket)
- Cable: S-UTP CABLE or FTP CABLE (CMP)
- Cable conductor: 4x2x(7x0.2)+96x0.12
- Optional: 3 m, 5 m, 10 m, 20 m, 30 m, 40 m and 50 m available
- Used for HCS-3900 series, HCS-4100/50 series and HCS-8300 series

**Ordering Information**

CBL6PS-01\_\_1 m 6-pin Extension Cable (with a plug and a socket)  
 CBL6PS-03\_\_3 m 6-pin Extension Cable (with a plug and a socket)  
 CBL6PS-05\_\_5 m 6-pin Extension Cable (with a plug and a socket)  
 CBL6PS-10\_\_10 m 6-pin Extension Cable (with a plug and a socket)  
 CBL6PS-20\_\_20 m 6-pin Extension Cable (with a plug and a socket)  
 CBL6PS-30\_\_30 m 6-pin Extension Cable (with a plug and a socket)  
 CBL6PS-40\_\_40 m 6-pin Extension Cable (with a plug and a socket)  
 CBL6PS-50\_\_50 m 6-pin Extension Cable (with a plug and a socket)  
 CBL6PS-03CMP.....3 m 6-pin Extension Cable (with a plug and a socket, CMP)  
 CBL6PS-05CMP.....5 m 6-pin Extension Cable (with a plug and a socket, CMP)  
 CBL6PS-10CMP.....10 m 6-pin Extension Cable (with a plug and a socket, CMP)  
 CBL6PS-20CMP.....20 m 6-pin Extension Cable (with a plug and a socket, CMP)  
 CBL6PS-30CMP.....30 m 6-pin Extension Cable (with a plug and a socket, CMP)  
 CBL6PS-40CMP.....40 m 6-pin Extension Cable (with a plug and a socket, CMP)  
 CBL6PS-50CMP.....50 m 6-pin Extension Cable (with a plug and a socket, CMP)



## CBL5300 Dedicated Transceiver Cable



### Features

- Dedicated cable for HCS-5300TD/TDS
- 1 x 6P-DIN male plug
- 1 x 6P-DIN female socket
- Optional: 5 m, 10 m, 20 m, 30 m, 40 m and 50 m available
- Ø 6 mm
- Color: black
- Attention: cable looks identical to CBL6PS but pin-assignment differs!! Please do not mix up!

### Ordering Information

CBL5300-05	.....	5 m Dedicated Transceiver Cable
CBL5300-10	.....	10 m Dedicated Transceiver Cable
CBL5300-20	.....	20 m Dedicated Transceiver Cable
CBL5300-30	.....	30 m Dedicated Transceiver Cable
CBL5300-40	.....	40 m Dedicated Transceiver Cable
CBL5300-50	.....	50 m Dedicated Transceiver Cable
CBL5300-05CMP	.....	5 m Dedicated Transceiver Cable (CMP)
CBL5300-10CMP	.....	10 m Dedicated Transceiver Cable (CMP)
CBL5300-20CMP	.....	20 m Dedicated Transceiver Cable (CMP)
CBL5300-30CMP	.....	30 m Dedicated Transceiver Cable (CMP)
CBL5300-40CMP	.....	40 m Dedicated Transceiver Cable (CMP)
CBL5300-50CMP	.....	50 m Dedicated Transceiver Cable (CMP)

## Coaxial-cable



### Features

- Equivalent impedance: 75 Ohm
- Ø 5 mm (RG-59)
- Ø 7 mm (RG-6/U)
- Length of per roll: 300 meter

### Ordering Information

RG-59	.....	Coaxial-cable (75 Ω)
RG-6/U	.....	Coaxial-cable (75 Ω)

## BNC Connector



### Features

- Used to connect HCS-5100M and HCS-5100T or between HCS-5100T
- Used with Coaxial-cable

### Ordering Information

BNC Connector	.....	BNC Connector (plug)
---------------	-------	----------------------

## HCS-4352T/50 6-pin Cable Splitter



### Features

- Relay facility, amplification of the communication signals
- 6P-DIN interfaces, "1 in / 3 out " structure for connection
- 2m-cable with a 6P-DIN connector at the input end
- Three 6PIN output interfaces, can drive 70-meter long extension cable
- Dimensions (h x w x d): 35 x 149 x 90 mm

### Ordering Information

HCS-4352T/50.....6-pin Cable Splitter (1 input & 3 outputs, for HCS-4100/50 and HCS-8300 series)

## HCS-4353/06 6-pin Grounding Cable Connection Socket



### Features

- For embedding cables to connect conference unit
- For connecting to HCS-3900 series, HCS-4100/50 series or HCS-8300 series conference unit
- Interface: 2 x 6P-DIN female socket
- The circuit ground pin of the socket is isolated from the protective earth

### Ordering Information

HCS-4353/06.....6-pin Grounding Cable Connection Socket (for HCS-3900, HCS-4100/50 and HCS-8300 series)

## Detachable 4P-DIN Standard Plug



### Features

- For soldering to 4P-DIN cable
- Removable DIN standard connector (4PIN)

### Ordering Information

4P-DIN plug (male).....Detachable 4P-DIN Standard Plug (male)

4P-DIN plug (female)....Detachable 4P-DIN Standard Plug (female)

## Solderable 4P-DIN Standard Socket



### Features

- For soldering to 4P-DIN cable
- Solderable 4P-DIN female socket with insulated isolation
- The circuit ground pin of the socket is isolated from the protective earth

### Ordering Information

4P-DIN socket.....Solderable 4P-DIN Standard Socket (insulating)



## Solderable 6P-DIN Standard Socket



---

### Features

- Cabinet installation accessory (mounted in a 19" rack)
- 1U high
- For HCS-8300MES and HCS-3900MES extension unit

---

### Ordering Information

Cabinet installation accessory... Cabinet installation accessory  
(for HCS-8300MES and  
HCS-3900MES)

**HCS-852KS  
Multifunctional Storage Case**



**Features**

- Used for storing and transporting TAIDEN series products

**Technical Specifications**

**Mechanical**

Dimensions h x w x d (mm)

Outside ..... 890 x 760 x 590

Inside ..... 620 x 705 x 535

Net weight ..... 31.0 kg

Color ..... Blue

**Ordering Information**

HCS-852KS... Multifunctional Storage Case (inner height 620 mm, free fit Foam Insert, holds up to 24 stem microphones in the case cover)

**HCS-852S-CMU  
Foam Insert**



**Features**

- Used to secure Conference System Main Unit and Extension Cable
- Stores up to 1 pc main unit with 2U high + 20-meter extension cable

**Technical Specifications**

**Mechanical**

Dimensions h x w x d (mm) ..... 118 x 700 x 530

Net weight ..... 1.0 kg

Color ..... Black

**Ordering Information**

HCS-852S-CMU ..... Foam Insert (for 1 pc main unit with 2U high+ 20 m extension cable)

**HCS-852S-DStyle  
Foam Insert**



**Features**

- Used to secure HCS-4330/32 congress units and stem microphones
- Stores up to 12 pcs HCS-4330/32 congress units + 8 pcs stem microphones

**Technical Specifications**

**Mechanical**

Dimensions h x w x d (mm).....100 × 700 × 530  
 Net weight.....0.9 kg  
 Color.....Black

**Ordering Information**

HCS-852S-Dstyle.....Foam Insert (for 12 pcs HCS-4330/32 + 8 pcs stem microphones)

**HCS-852S-GStyle  
Foam Insert**



**Features**

- Used to secure HCS-4886/87/88 congress units and stem microphones
- Stores up to 10 pcs HCS-4886/87/88 congress units + 6 pcs stem microphones

**Technical Specifications**

**Mechanical**

Dimensions h x w x d (mm).....150 × 700 × 530  
 Net weight.....1.0 kg  
 Color.....Black

**Ordering Information**

HCS-852S-Gstyle.....Foam Insert (for 10 pcs HCS-4886/87/88 + 6 pcs stem microphones)

**HCS-852S-1U  
Foam Insert**



**Features**

- Used to secure 2 pcs devices of 1U height and attached cables
- Stores up to 2 pcs devices of 1U height and attached cables

**Technical Specifications**

**Mechanical**

Dimensions h x w x d (mm).....55 x 700 x 530  
 Net weight.....0.7 kg  
 Color.....Black

**Ordering Information**

HCS-852S-1U.....Foam Insert (for 2 pcs devices of 1U height and attached cables)

**HCS-852S-4338  
Foam Insert**



**Features**

- Used to secure HCS-3638/HCS-4338/HCS-3938 conference units, stem microphones and attached cables
- Stores up to 16 pcs HCS-3638/HCS-4338/HCS-3938 conference units + 10 pcs stem microphones + attached cables

**Technical Specifications**

**Mechanical**

Dimensions h x w x d (mm).....150 x 700 x 530  
 Net weight.....1.0 kg  
 Color.....Black

**Ordering Information**

HCS-852S-4338.....Foam Insert (for 16 pcs HCS-3638/HCS-4338/HCS-3938 + 10 pcs stem microphones + attached cables)



**HCS-852S-4385U  
Foam Insert**



**Features**

- Used to secure HCS-4385U/50 interpreter units and stem microphones
- Stores up to 6 pcs HCS-4385U/50 interpreter units + 2 pcs stem microphones

**Technical Specifications**

**Mechanical**

Dimensions h x w x d (mm).....100 x 700 x 530  
 Net weight.....0.9 kg  
 Color.....Black

**Ordering Information**

HCS-852S-4385U.....Foam Insert (for 6 pcs HCS-4385U/50 + 2 pcs stem microphones)

**HCS-852S-5100T  
Foam Insert**



**Features**

- Used to secure HCS-5100T Digital Infrared Radiator and HCS-4385U/50 Interpreter Units
- Stores up to 1 pc HCS-5100T + 2 pcs HCS-4385U/50

**Technical Specifications**

**Mechanical**

Dimensions h x w x d (mm).....200 x 700 x 530  
 Net weight.....1.6 kg  
 Color.....Black

**Ordering Information**

HCS-852S-5100T.....Foam Insert (for 1 pc HCS-5100T + 2 pcs HCS-4385U/50)

**HCS-852S-5300CHG  
Foam Insert**



**Features**

- Used to secure HCS-5300CHG/08 Charging Units
- Stores up to 2 pcs HCS-5300CHG/08

**Technical Specifications**

**Mechanical**

Dimensions h x w x d (mm).....100 x 700 x 530  
 Net weight.....1.0 kg  
 Color.....Black

**Ordering Information**

HCS-852S-5300CHG....Foam Insert (for 2 pcs HCS-5300CHG/08)

**HCS-852S-5300D  
Foam Insert**



**Features**

- Used to secure HCS-5300 Series Digital Infrared Wireless Conference Units
- Stores up to 8 pcs HCS-5300 Digital Infrared Wireless Conference Units

**Technical Specifications**

**Mechanical**

Dimensions h x w x d (mm).....100 x 700 x 530  
 Net weight.....1.0 kg  
 Color.....Black

**Ordering Information**

HCS-852S-5300D.....Foam Insert (for 8 pcs HCS-5300 wireless conference units)

**HCS-852S-5300TD  
Foam Insert**



**Features**

- Used to secure HCS-5300CHG/08 Charging Unit and HCS-5300TD Digital Infrared Transceiver
- Stores up to 1 pc HCS-5300CHG/08 + 2 pcs HCS-5300TD

**Technical Specifications**


**Mechanical**

Dimensions h x w x d (mm).....100 x 700 x 530  
 Net weight.....1.0 kg  
 Color.....Black

**Ordering Information**

HCS-852S-5300TD.....Foam Insert (for 1 pc HCS-5300CHG/08 + 2 pcs HCS-5300TD)

**HCS-852S-8338  
Foam Insert**

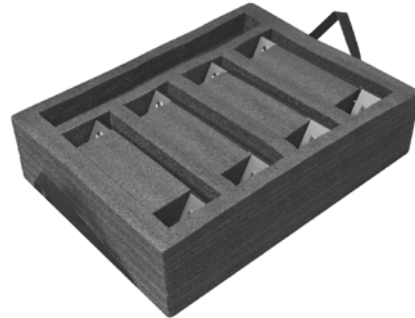

**Features**

- Used to secure HCS-8338/HCS-8335 Multimedia Congress Terminals
- Stores up to 4 pcs HCS-8338/HCS-8335 Multimedia Congress Terminals

**Technical Specifications**

**Mechanical**

Dimensions h x w x d (mm).....178 x 700 x 530  
 Net weight.....1.2 kg  
 Color.....Black

**Ordering Information**

HCS-852S-8338.....Foam Insert (for 4 pcs HCS-8338/HCS-8348/HCS-8335/HCS-8336 series Congress Terminals)

**HCS-852S-4866  
Foam Insert**



**Features**

- Used to secure HCS-4866/50 series congress units
- Stores up to 8 pcs HCS-4866/50 series congress units

**Technical Specifications**

**Mechanical**

Dimensions h x w x d (mm).....150 x 700 x 530  
 Net weight.....1.6 kg  
 Color.....Black

**Ordering Information**

HCS-852S-4866.....Foam Insert (for 8 pcs HCS-4866/50 series congress units)

**HCS-852S-4890  
Foam Insert**



**Features**

- Used to secure HCS-4890/50 series congress units and stem microphones
- Stores up to 12 pcs HCS-4890/50 series congress units + 12 pcs stem microphones

**Technical Specifications**

**Mechanical**

Dimensions h x w x d (mm).....130 x 700 x 530  
 Net weight.....1.3 kg  
 Color.....Black

**Ordering Information**

HCS-852S-4890.....Foam Insert (for 12 pcs HCS-4890/50 series congress units + 12 pcs stem microphones)

**HCS-852S-4891R  
Foam Insert**



**Features**

- Used to secure HCS-4891R/50(/2M) series congress units
- Stores up to 8 pcs HCS-4891R/50(/2M) series congress units

**Technical Specifications**

**Mechanical**

Dimensions h x w x d (mm).....130 x 700 x 530  
 Net weight.....1.3 kg  
 Color.....Black

**Ordering Information**

HCS-852S-4891R.....Foam Insert (for 8 pcs HCS-4891R/50(/2M) series congress units)

**HCS-852S-8368A  
Foam Insert**



**Features**

- Used to secure HCS-8368A/50 series tabletop Multimedia Congress Terminals
- Stores up to 5 pcs HCS-8368A/50 series tabletop Multimedia Congress Terminals

**Technical Specifications**

**Mechanical**

Dimensions h x w x d (mm).....224 x 700 x 530  
 Net weight.....1.4 kg  
 Color.....Black

**Ordering Information**

HCS-852S-8368A.....Foam Insert (for 5 pcs HCS-8368A/50 series tabletop Congress Terminals)

**HCS-852S-8385  
Foam Insert**



**Features**

- Used to secure HCS-8385/80 interpreter units
- Stores up to 6 pcs HCS-8385/80 interpreter units

**Technical Specifications**

**Mechanical**

Dimensions h x w x d (mm).....120 x 700 x 530  
 Net weight.....1.2 kg  
 Color.....Black

**Ordering Information**

HCS-852S-8385.....Foam Insert (for 6 pcs HCS-8385/80 interpreter units)

**HCS-853KS  
Transport Cabinet**



**Features**

- Used for storing and transporting TAIDEN series main units

**Technical Specifications**

**Mechanical**

Dimensions h x w x d (mm).....890 x 590 x 545  
 Net weight.....33.7 kg  
 Color.....Blue

**Ordering Information**

HCS-853KS.....Transport Cabinet (inner height 15U)

## HCS-854KS Portable Multifunctional Storage Case



---

### Features

- Used for storing and transporting TAIDEN series products

---

### Technical Specifications

#### Mechanical

Dimensions h x w x d (mm)

Outside..... 338 × 663 × 496

Inside..... 299 × 575 × 406

Net weight..... 10.5 kg

Color..... Black

---

### Ordering Information

HCS-854KS..... Portable Multifunctional Storage Case  
(inner height 299 mm, free fit Foam Insert)





**HCS-854S-CMU  
Foam Insert**



**Features**

- Used to secure Conference System Main Unit
- Stores up to 1 pc main unit with 2U high

**Technical Specifications**

**Mechanical**

Dimensions h x w x d (mm).....118 x 573 x 408  
 Net weight.....0.6 kg  
 Color.....Black

**Ordering Information**

HCS-854S-CMU.....Foam Insert (for 1 pc main unit with 2U high)

**HCS-854S-MIC  
Foam Insert**



**Features**

- Used to secure stem microphones
- Stores up to 11 pcs stem microphones

**Technical Specifications**

**Mechanical**

Dimensions h x w x d (mm).....55 x 573 x 408  
 Net weight.....0.6 kg  
 Color.....Black

**Ordering Information**

HCS-854S-MIC.....Foam Insert (for 11 pcs stem microphones)

**HCS-8524S-4338  
Foam Insert**



**Features**

- Used to secure HCS-3638/HCS-4338 conference units
- Stores up to 10 pcs HCS-3638/HCS-4338 conference units

**Technical Specifications**

**Mechanical**

Dimensions h x w x d (mm).....120 x 573 x 408  
 Net weight.....0.7 kg  
 Color.....Black

**Ordering Information**

HCS-854S-4338.....Foam Insert (for 10 pcs HCS-3638/HCS-4338)

**HCS-854S-4385U  
Foam Insert**



**Features**

- Used to secure HCS-4385U/50 interpreter units and stem microphones
- Stores up to 3 pcs HCS-4385U/50 interpreter units + 4 pcs stem microphones

**Technical Specifications**

**Mechanical**

Dimensions h x w x d (mm).....98 x 573 x 408  
 Net weight.....0.6 kg  
 Color.....Black

**Ordering Information**

HCS-854S-4385U.....Foam Insert (for 3 pcs HCS-4385U/50 + 4 pcs stem microphones)

**HCS-854S-4886  
Foam Insert**



**Features**

- Used to secure HCS-4886/87/88 congress units and stem microphones
- Stores up to 3 pcs HCS-4886/87/88 congress units + 4 pcs stem microphones

**Technical Specifications**

**Mechanical**

Dimensions h x w x d (mm).....98 x 573 x 408  
 Net weight.....0.7 kg  
 Color.....Black

**Ordering Information**

HCS-854S-4886.....Foam Insert (for 3 pcs HCS-4886/87/88 + 4 pcs stem microphones)

**HCS-854S-5100T  
Foam Insert**



**Features**

- Used to secure HCS-5100T Digital Infrared Radiator
- Stores up to 1 pc HCS-5100T

**Technical Specifications**

**Mechanical**

Dimensions h x w x d (mm).....178 x 573 x 408  
 Net weight.....0.9 kg  
 Color.....Black

**Ordering Information**

HCS-854S-5100T.....Foam Insert (for 1 pc HCS-5100T)

**HCS-854S-5300  
Foam Insert**



**Features**

- Used to secure HCS-5300 wireless conference units and stem microphones
- Stores up to 4 pcs HCS-5300 wireless conference units + 4 pcs stem microphones

**Technical Specifications**

**Mechanical**

Dimensions h x w x d (mm).....98 × 573 × 408  
 Net weight.....0.7 kg  
 Color.....Black

**Ordering Information**

HCS-854S-5300.....Foam Insert (for 4 pcs HCS-5300 wireless conference units + 4 pcs stem microphones)

**HCS-854S-8338  
Foam Insert**



**Features**

- Used to secure HCS-8338/HCS-8335 Multimedia Congress Terminals
- Stores up to 3 pcs HCS-8338/HCS-8335 Multimedia Congress Terminals

**Technical Specifications**

**Mechanical**

Dimensions h x w x d (mm).....178 × 573 × 408  
 Net weight.....0.8 kg  
 Color.....Black

**Ordering Information**

HCS-854S-8338.....Foam Insert (for 3 pcs HCS-8338/HCS-8348/HCS-8335/HCS-8336 series Congress Terminals)